

Coaxial Switch

SP9T-10T/2.92/26.5GHz/Latching Type

Features:

- DC to 26.5GHz
- Higher reliability and longer lifespan
- Wide frequency range
- Low insertion loss, Low standing wave, high isolation

Typical Applications:

- 5G communication testing, automated testing equipment
- Communication and Navigation System
- Military Aerospace Communication System
- Precision measuring equipment, radar transmitter RF signal control

Electrical Specifications:

Parameter	Typical			
	DC-6GHz	6-12.4GHz	12.4-18GHz	18-26.5GHz
Frequency Range	DC-6GHz	6-12.4GHz	12.4-18GHz	18-26.5GHz
VSWR(Max)	1.30	1.40	1.50	1.60
Insertion Loss(Max)	0.30dB	0.40dB	0.50dB	0.60dB
Isolation(Min)	70dB	65dB	60dB	55dB
Power handing(W)	30W	20W	15W	10W


Technical Specifications:

Parameter	Typical
RF Impedance	50Ω
Control voltage/current	DC12V/200mA,RESET=N*200mA
	DC12V/100mA,RESET=N*100mA
Switching time	<20ms
Operating life	>1000000cycles
Operating Temperature	-25℃ to+65℃
RF Interface	K(2.92mm) female


Coaxial Switch

SP9T-10T/2.92/26.5GHz/Latching Type

Schematics:

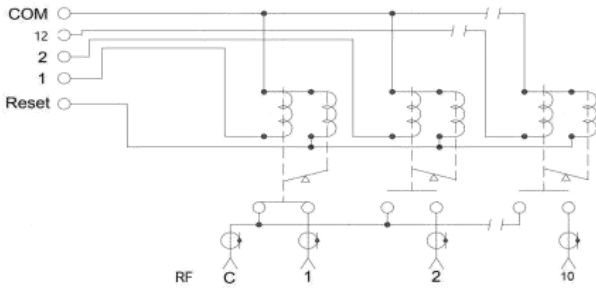


Volatge Control

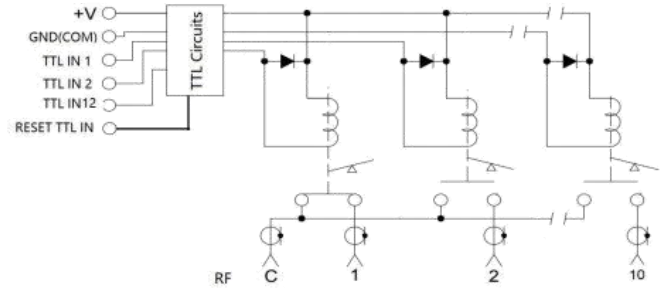

With TTL Logic Control

Outline Drawing:

All Dimensions in mm

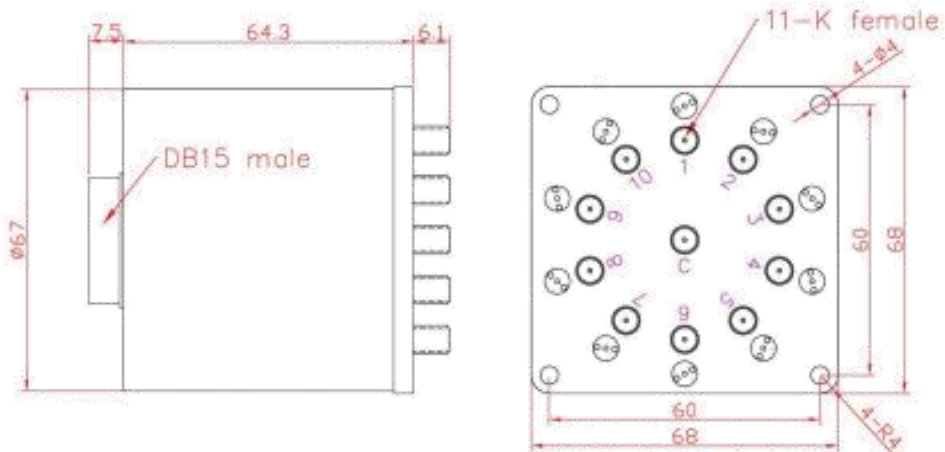

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersontech.com for additional data-sheets and product information.