

DC~6GHz Coaxial Fixed Load, 30Watt, N-M

P/N:YX-TN6G-JP30

Features

- Instrumentation Grade
- High Return Loss

Typical Applications

- Test Lab
- Sub-assemblies

Specification Temperature

Operating Temperature

Sub-assemblies System Integration	
Electrical Specifications	
Frequency Range	DC-6GHz
VSWR	1.25max
Impedance	50 ohm
Power Handling	30W

-45° to+ 100°

-45 $^{\circ}$ to+ 125 $^{\circ}$

Mechanical Specification	
Connector Type	N-M
Outer Contact	Stainless Steel
Surface Treatment	Aluminum, black anodized
Weight	/
Outline	/




DC~6GHz Coaxial Fixed Load, 30Watt, N-M

P/N:YX-TN6G-JP30

Outline Drawing:

All Dimensions in mm (inches)Outline

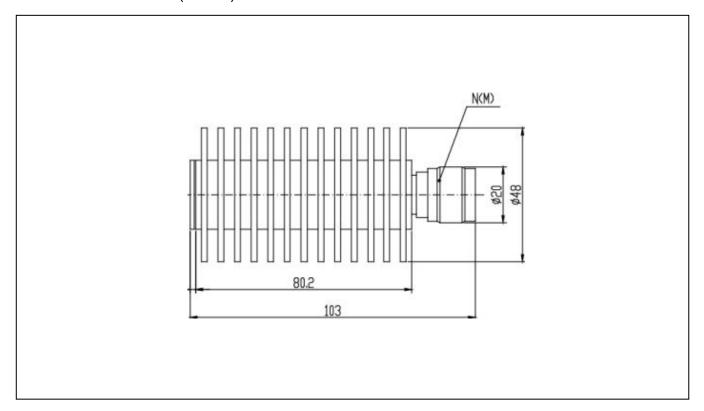



YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersontech.com for additional datasheets and product information.