

DC~6GHz Coaxial Fixed Load, 2Watt, SMA-M


P/N:YX-TSMA6G-JP2

Features

- Instrumentation Grade
- High Return Loss

Typical Applications

- Test Lab
- Sub-assemblies
- System Integration



Electrical Specifications


Frequency Range	DC-6GHz
VSWR	1.2max
Impedance	50 ohm
Power Handling	2W
Specification Temperature	-45° to+ 100°
Operating Temperature	-45° to+ 125°

Mechanical Specification

Connector Type	SMA-M
Outer Contact	Stainless Steel
Surface Treatment	Aluminum, black anodized
Weight	/
Outline	/

Outline Drawing:

All Dimensions in mm (inches)Outline

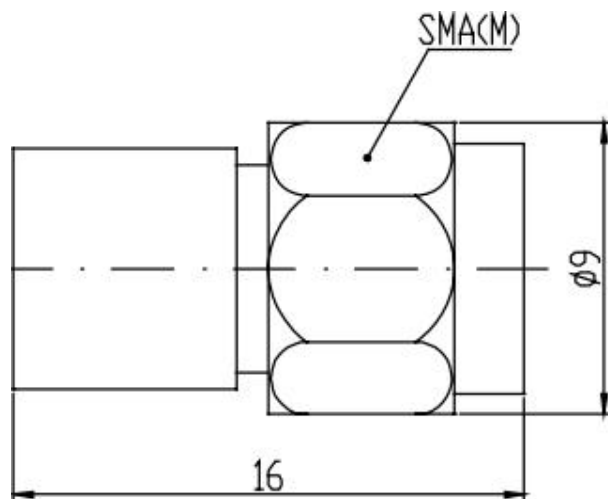

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersontech.com for additional datasheets and product information.