

#### Features:

- Stable product performance
- long service life

#### Typical Applications:

- Testing system
- Radar
- Satellite communication
- Instrumentation



#### Electrical & Mechanical Specifications


Frequency Range	DC~18GHz				
Attenuation	/	/	10dB	20dB	30dB
Attenuation Accuracy	/	/	10dB±1.0	20dB±1.0	30dB±1.0
VSWR	≤1.5				
Input Power(CW)	300W				
Impedance	50ohm				
Weight	/				
Input / Output Connectors	N-Female/N-Male				
Connector Body	Nickel plated brass				
Surface treatment	Aluminum case, black oxidation				

## Environmental Specifications

Operational Temperature	-55°C~+125°C
Storage Temperature	-55°C~+125°C
Altitude	/
(Optional)	/
Vibration	/
Humidity	/
Shock	/

## Outline Drawing:

All Dimensions in mm (inches)

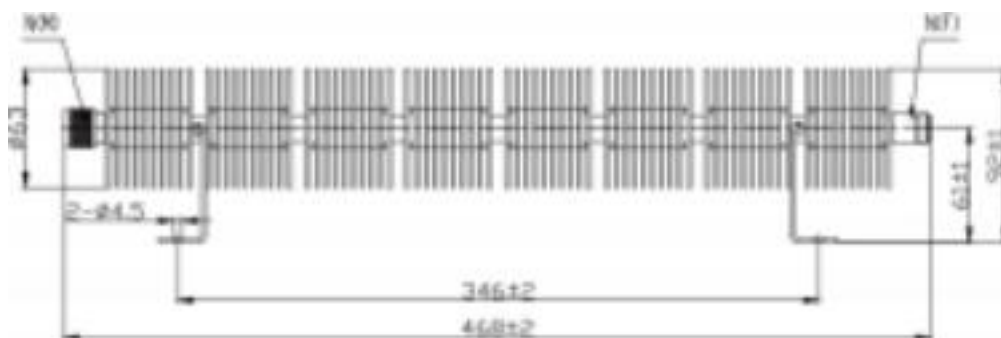

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit [www.yersontech.com](http://www.yersontech.com) for additional datasheets and product information.