


Features:

- Stable product performance
- long service life

Typical Applications:

- Testing system
- Radar
- Satellite communication
- Instrumentation



Electrical & Mechanical Specifications

Frequency Range	DC~3GHz				
Attenuation	3dB	6dB	10dB	20dB	30dB
Attenuation Accuracy	3dB $\pm$ 0.75	3dB $\pm$ 0.75	10dB $\pm$ 0.75	20dB $\pm$ 0.75	30dB $\pm$ 0.75
VSWR	≤ 1.3				
Input Power(CW)	50W				
Impedance	50ohm				
Weight	245g				
Input / Output Connectors	N-Female/N-Male				
Connector Body	Copper nickel plated				
Product surface processing	Shell aluminum, black oxidation				




Environmental Specifications

Operational Temperature	-55°C~+125°C
Storage Temperature	-55°C~+125°C
Altitude	/
(Optional)	/
Vibration	/
Humidity	/
Shock	/

Outline Drawing:

All Dimensions in mm (inches)

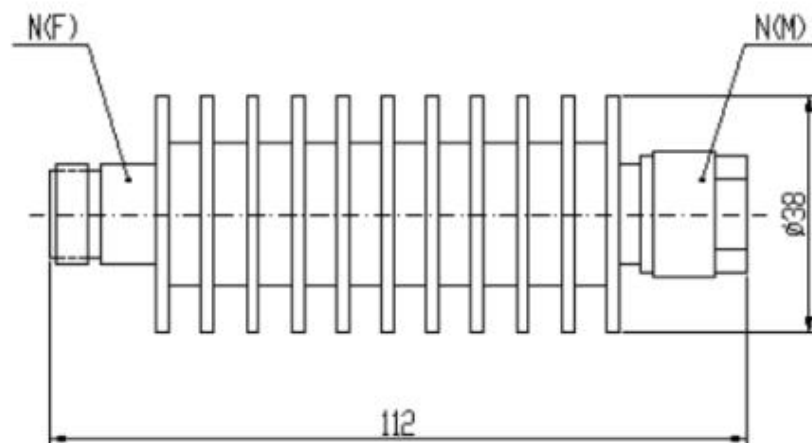

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersontech.com for additional datasheets and product information.