


Features:

- Stable product performance
- long service life

Typical Applications:

- Testing system
- Radar
- Satellite communication
- Instrumentation



Electrical & Mechanical Specifications

Frequency Range	DC~6GHz				
Attenuation	1-9dB	10dB	20dB	30dB	40dB
Attenuation Accuracy	1-9dB $\pm$ 0.6	10dB $\pm$ 0.8	20dB $\pm$ 0.8	30dB $\pm$ 0.8	40dB $\pm$ 0.8
VSWR	$\leq$ 1.2				
Input Power(CW)	10W				
Impedance	50ohm				
Weight	/				
Input / Output Connectors	SMA-Female/SMA-Male				
Connector Body	Nickel plating on brass				
Surface treatment	Aluminum Case Black				




Environmental Specifications

Operational Temperature	-55°C~+125°C
Storage Temperature	-55°C~+125°C
Altitude	/
(Optional)	/
Vibration	/
Humidity	/
Shock	/

Outline Drawing:

All Dimensions in mm (inches)

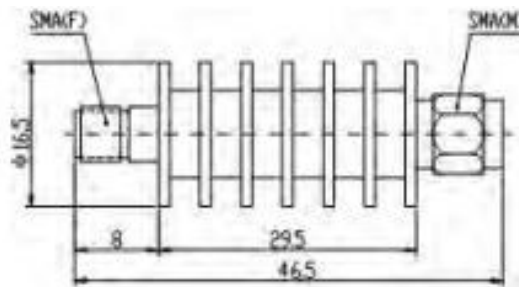

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersontech.com for additional datasheets and product information.