

18.0 - 26.5 GHz Waveguide Coaxial Adapter Right Angle

P/N: YX-WA42-OS2.4F

Descriptions:

Model YX-WA42-2.4 is a WR42 Waveguide Coaxial

Adapter with 2.4 connector,90° Right Angle from 18.0

to 26.5 GHz,the RF port is equipped with OS2.4mm connector which is optional.

Features:

- Low loss,VSWR
- Good matching
- Wideband characteristics

Applications:


- Microwave communication
- Radar systems
- The field of test and measurement



Electrical & Environmental Specifications	
Frequency Range	18.0 - 26.5GHz
Insertion Loss	≤0.4dB
VSWR	≤1.25
Operating Temperature	-55° to +85° C

Mechanical Specifications	
Flange Type	UBR220(FBP220)
Coaxial Connector	OS2.4-Female/Male
Configuration	Right Angle
Material	Brass/Aluminum
Inside finish	Gold plating/Chromate
Outside Finish	Blue/Grey painting(Optional)

Outline Drawing (Unit:mm) :

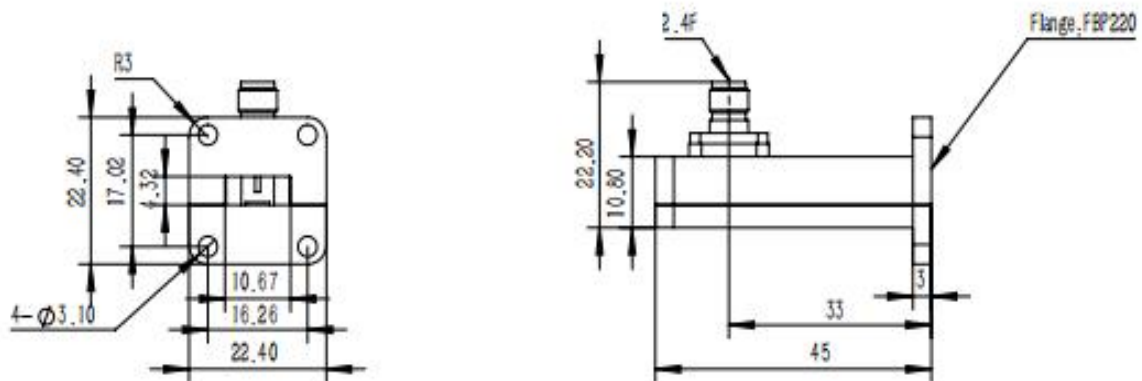

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersonotech.com for additional datasheets and product information.