

40-60GHz Standard Gain Horn Antenna with WR19 Waveguide Port P/N: YX-SGH19-20

Descriptions:

Model **YX-SGH19-20** is a standard gain horn antenna that operates from 40 to 60 GHz, it is linear polarization, The RF port is equipped with waveguide flange which is optional.



Features:

- Wideband Frequency, High Gain
- Excellent Directionality, linear Polarization
- Lightweight, high reliability, and long lifespan

Applications:

- Antenna Communication System
- Antenna Measurement and Calibration
- Research and Experimentation




Electrical & Environmental Characteristics	
Frequency	40-60GHz
Gain	20 dB typical
VSWR	2.0 max
Polarization	Linear
E-Plane 3 dB Beamwidth	15 to 11 degrees
H-Plane 3 dB Beamwidth	17 to 12 degrees
Cross Polarization	-25dB max
Specification Temperature	+25℃
Operating Temperature	-40°C~+85°C


Mechanical Specifications	
Antenna Port	WR19 Waveguide
Flange	UG383/U/ optional
Material	Brass
Finishing Inside and Outside	Gold plating inside and outside
Size	28.41*34.01*78.20 mm
Weight (approx.)	I




40-60GHz Standard Gain Horn Antenna with WR19 Waveguide Port P/N: YX-SGH-19-20

Outline Drawing (Unit:mm):




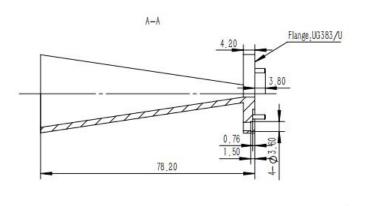


VSWR VS Frequency



3dB Beamwidth

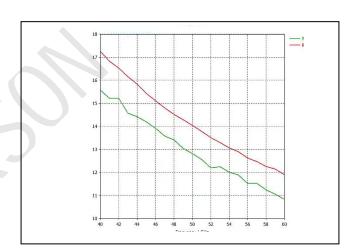

Gain VS Frequency Plots



Notice: All of the aboving data is simulation for reference.

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersontech.com for additional datasheets and product information.