


Features:

- Stable product performance
- long service life

Typical Applications:

- Testing system
- Radar
- Satellite communication
- Instrumentation



Electrical & Mechanical Specifications

Frequency Range	DC~6GHz				
Attenuation	3dB	6dB	10dB	20dB	30dB
Attenuation Accuracy	3dB \pm 0.8	6dB \pm 0.8	10dB \pm 1.2	20dB \pm 1.2	30dB \pm 1.2
VSWR	\leq 1.25				
Input Power(CW)	2W				
Impedance	50ohm				
Weight	2ounces				
Input / Output Connectors	N-Female/N-Male				
Connector Body	Copper plated with nickel				
Center Contact	Gold plated beryllium copper/brass				




Environmental Specifications

Operational Temperature	-55°C~+125°C
Storage Temperature	-55°C~+125°C
Altitude	/
(Optional)	/
Vibration	/
Humidity	/
Shock	/

Outline Drawing:

All Dimensions in mm (inches)

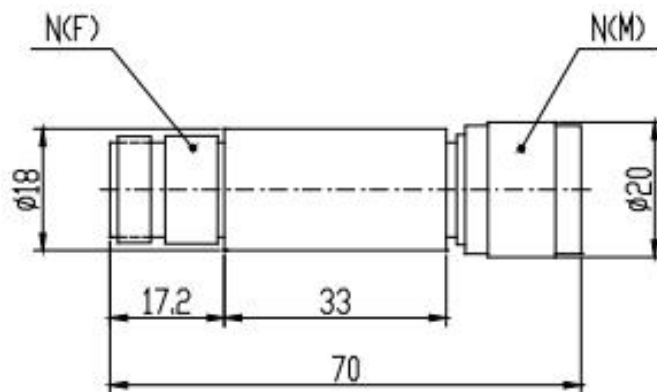

YERSON and its affiliates reserve the right to make changes to the products or information contained herein without prior notice. Please visit www.yersontech.com for additional datasheets and product information.